

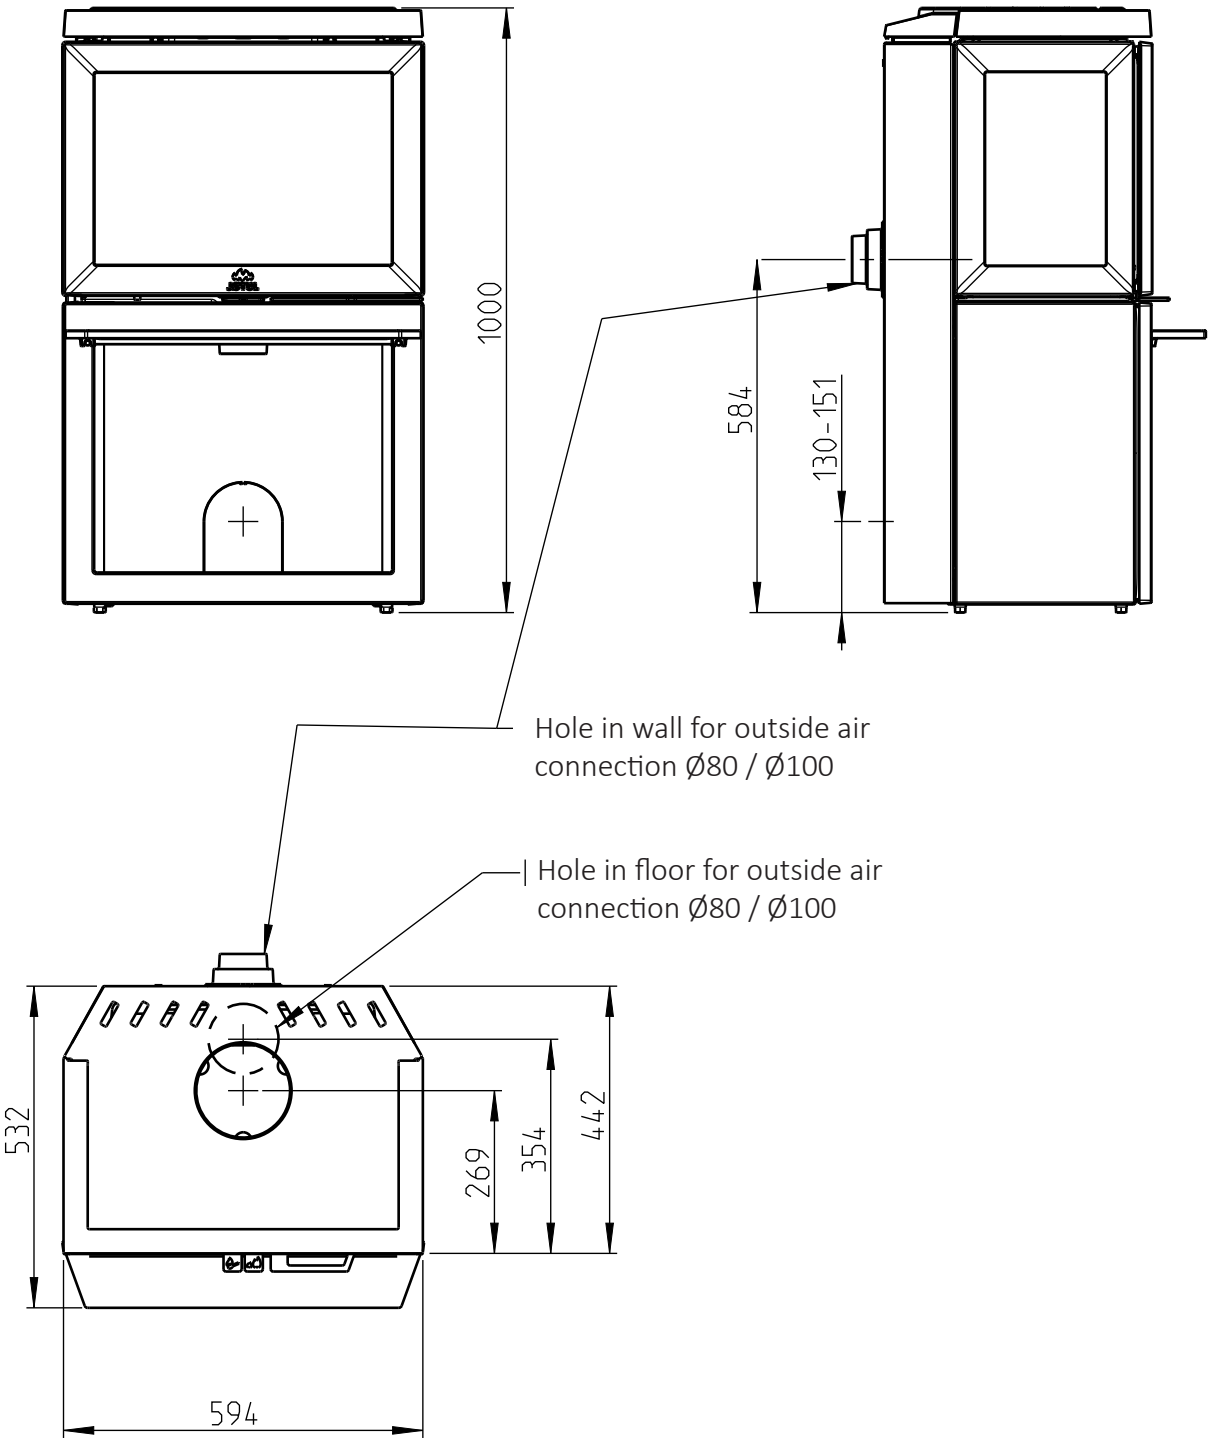



JØTUL F 520 / JØTUL F 520 High Top



Minimum clearance from furniture/combustible materials

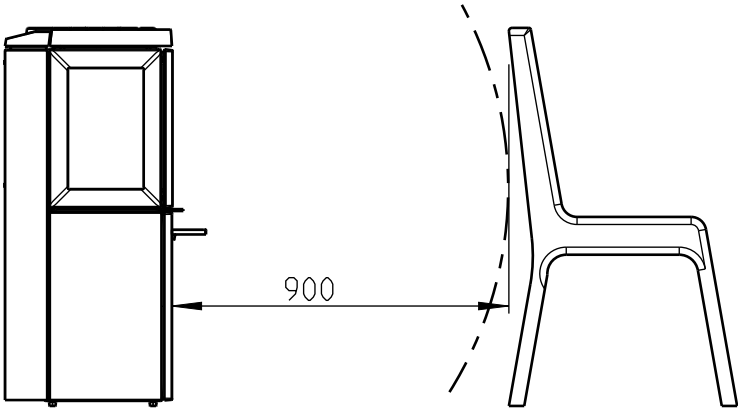


Minimum distance to ceiling

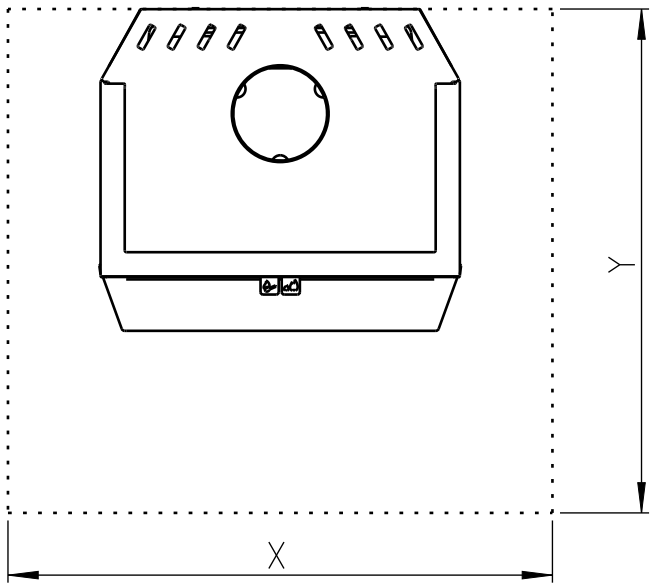


Min. dimensions for floor plate




X/Y = in compliance with national laws and regulations

Rear outlet
Only for HT



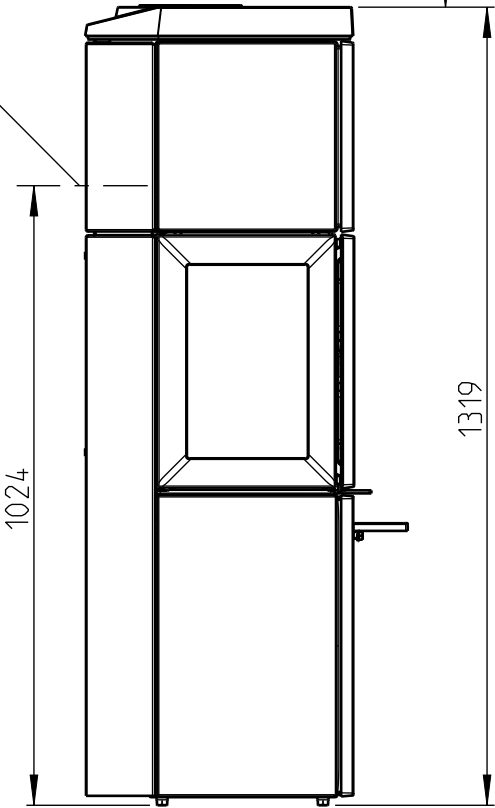


F 520 / F 520 LB / F 520 HT :
Minimum distance to combustible wall





With semi-insulated chimney/shielded flue pipe all the way down to the product  Combustible wall


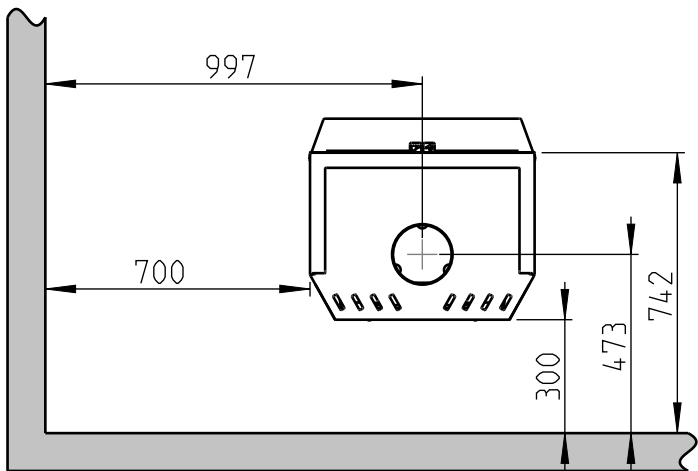
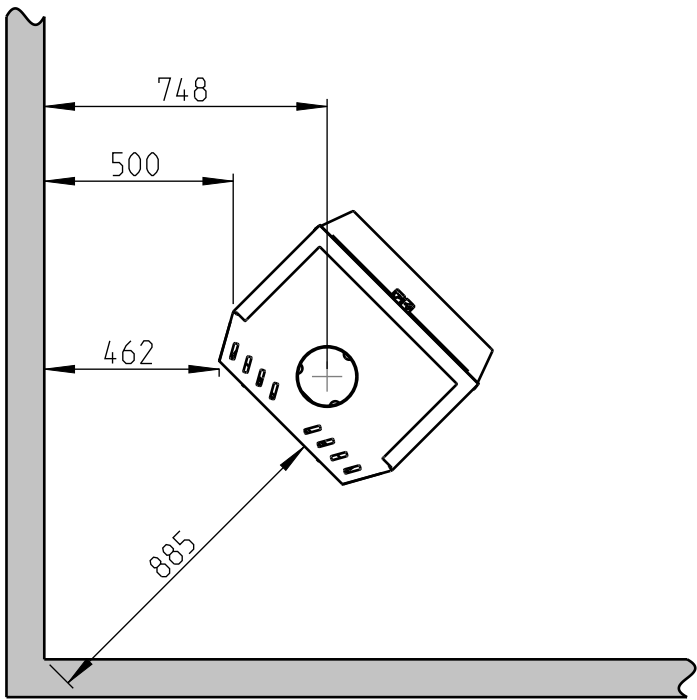



F 520 / F 520 LB / F 520 HT
With retrofitted cast iron side

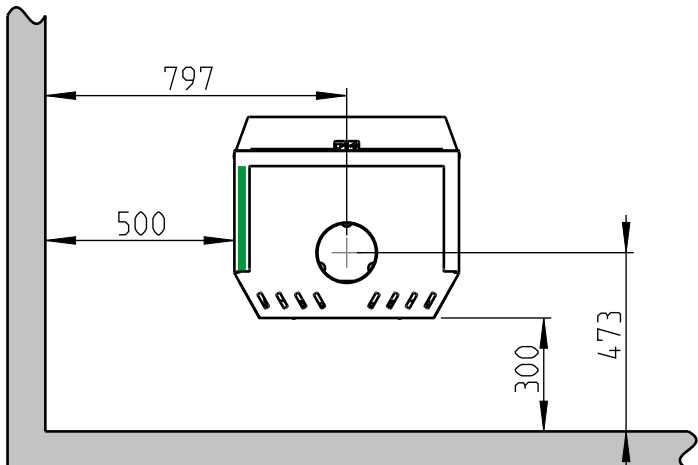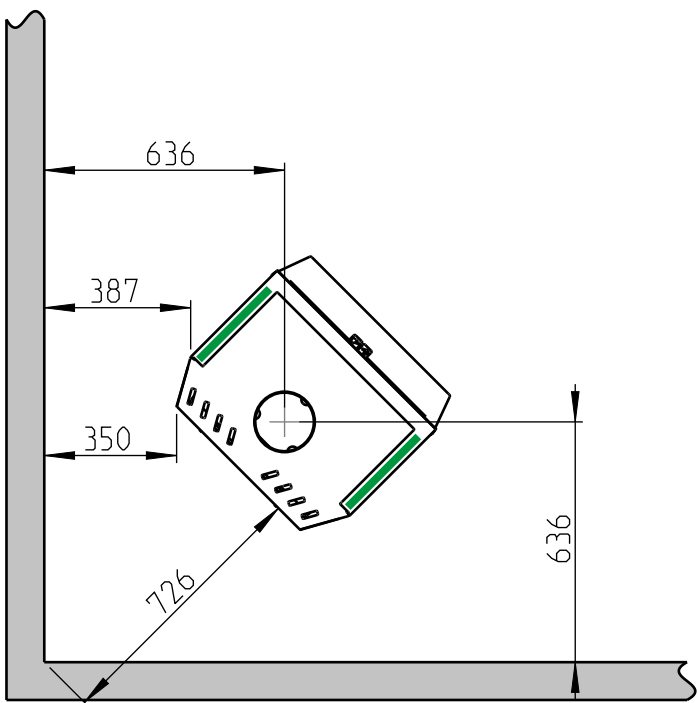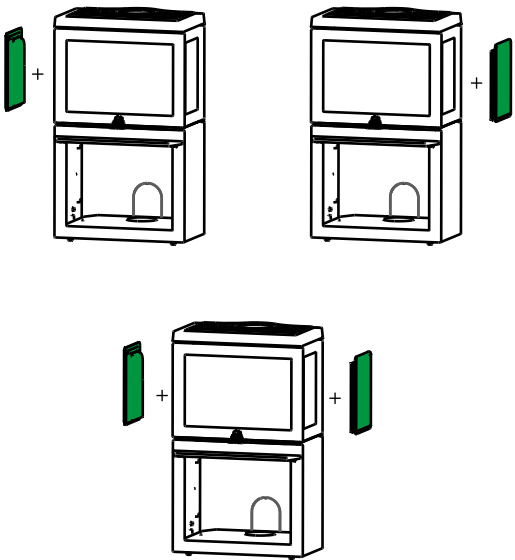

F 520 / F 520 LB / F 520 HT
- With retrofitted cast iron side and convection kit side
- With retrofitted convection kit rear

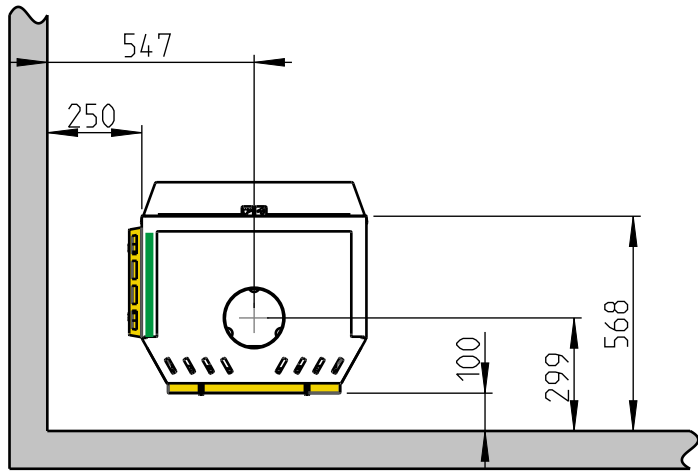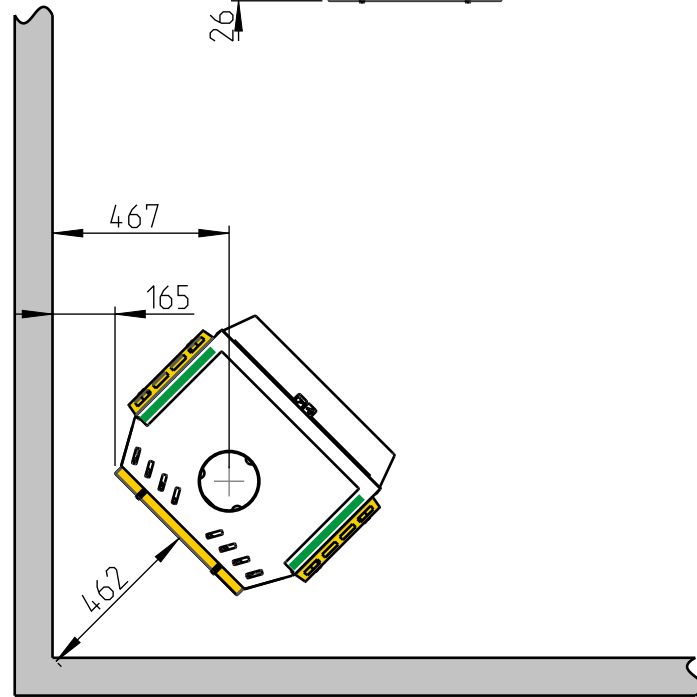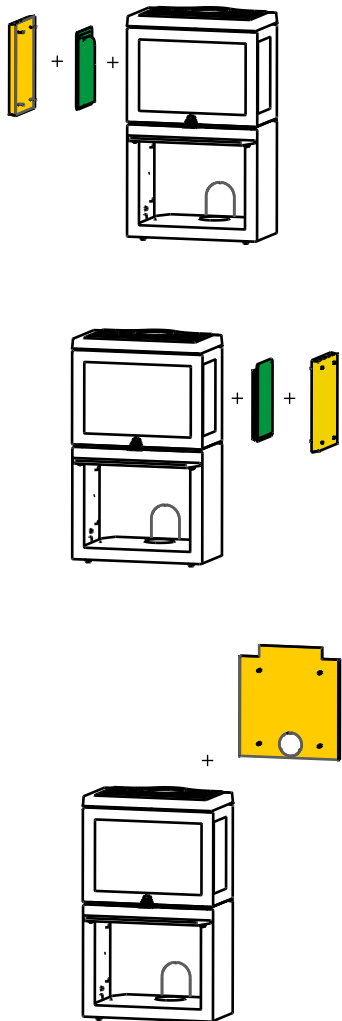

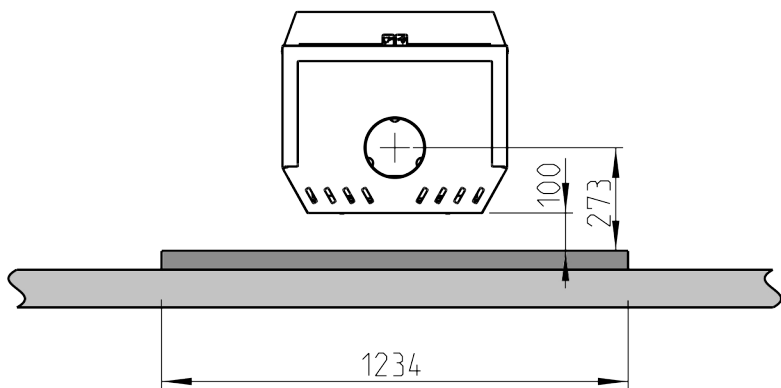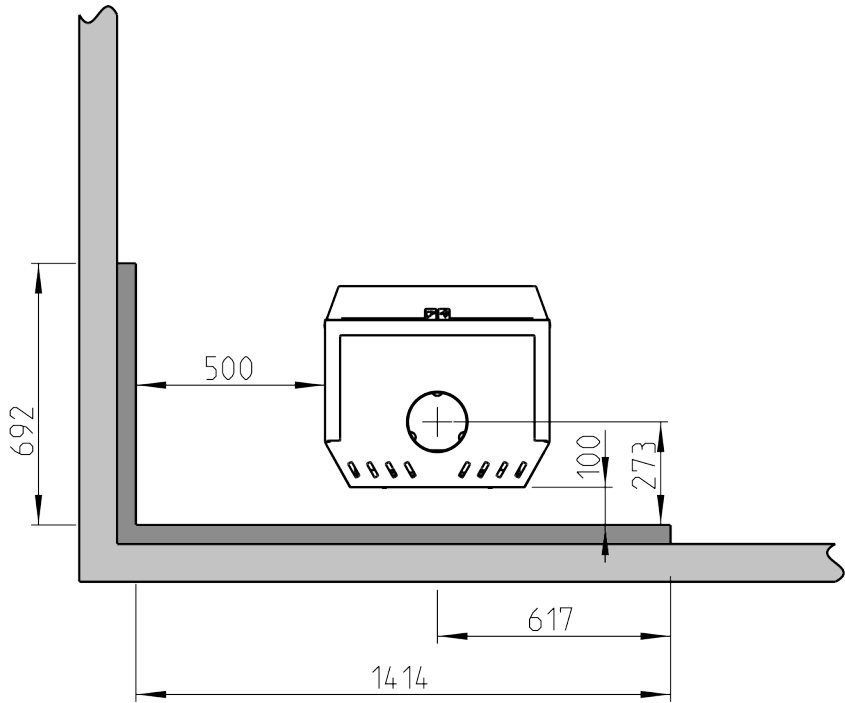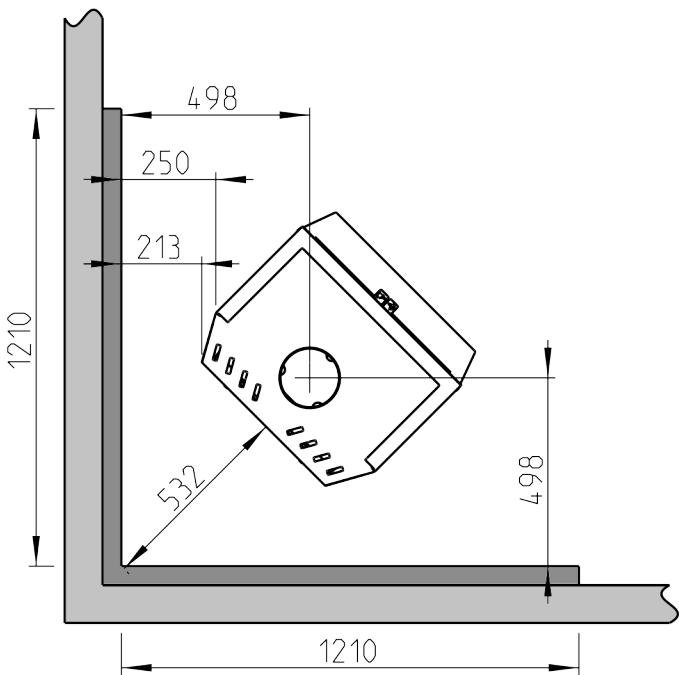

F 520 / F 520 LB / F 520 High Top:

With retrofitted cast iron side

